

## FILTER HOUSINGS

DP

**Mono, Duo and Trio patented and registered models. Housings suitable for both cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring end-cap.**

Housings provided with **Filterfit**: special centering device for SX cartridges.

IN/OUT connections 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2" with brass or plastic BSP threads; models with NPT plastic threads 1/4", 1/2", 3/4", 1". Cartridge heights 5", 7", 10", 20".

Models with transparent (TS) or opaque (AB, BW) bowls.

**M** models with 2 manometers.

**S** models 10" and 20" with discharge valve for self-cleaning performance, provided with a drain funnel to protect potable water from back-flow pollution, in compliance with UNI EN 1717 - 11/2002.

**MP** models with plastic male IN/OUT connections BSP threads.

**Max working pressure:**

BSP versions 8 bar (116 psi).


NPT versions 8,6 bar (125 psi).

**Max working temperature:** 45°C (113°F).

**Accessory included:** Filterfit.

**Accessories on demand:** spanner, wall brackets, brass and plastic nipples, base (10" models only), KIT AUTO (discharge automation kit), Lubrikit.

**Main materials:** Reinforced PP, PET.

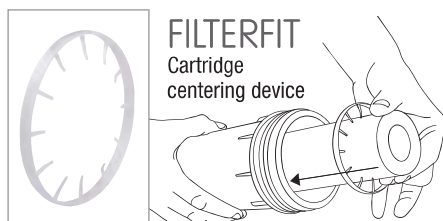

20" MONO TS



10" S M MONO TS

**DRAIN FUNNEL**  
Back-flow preventing device  
UNI EN 1717-11/2002



10" MONO MP AB



10" DUO TS



10" TRIO BW